PRODUCTION GUIDE · THESIS WALKTHROUGH VIDEO

3-Minute Walkthrough Video Guide

Calbayog Cultural Convention Center: a spatial analysis of the existing 840 m^2 interior, and a walkthrough of the proposed evidence-based interior design response.

3:00	9	~420	2
total runtime	segments along one camera path	words of narration at ~145 words/min	versions of every shot: existing and proposed

THE ONE SENTENCE THE VIDEO HAS TO LAND

The hall was failing its users in measurable ways, and every proposed change answers one of those failures without touching the structure.

Story arc

Problem
0:00–0:28 · what the analysis found

Response: walk through it
0:28–2:46 · lobby → threshold wall → ceiling → walls & floor → stage → four layouts

Close
2:46–3:00

How to use this guide

- **Page 2** gives the run of show and the camera path on the plan. Build your Enscape video path from it.
- **Pages 3–7** are the segment cards: camera move, the existing and proposed shot, on-screen text, the narration to read, and the reasoning behind each design move.
- **Page 8** is the side-by-side comparison of existing and proposed conditions. Keep it on hand for Q&A.
- **Pages 9–10** cover how to show the comparison on screen, production settings, a clip checklist and accuracy checks.

Rule of thumb for 3 minutes


- **Narration says why. Labels say what.** Specs (NRC, mm, lux) go on floating callout labels in the render. Your voice gives the reason.
- **One idea per shot.** If the camera is on the ceiling, talk about the ceiling.
- **Always tag the state.** A small EXISTING or PROPOSED label in the corner of every clip, so viewers never confuse the two.
- **Record the voice first,** then cut the video to it. Timing is far easier that way.

Sources used for this guide: Chapter 4 (data presentation and design outputs), Chapter 5 (summary and conclusions), the Interior Design Framework Specification, and the existing physical site audit. Figures quoted are as stated in those files on 24 Oct 2026; re-check them if the manuscript changes.

Run of show

TIME	#	SEGMENT	WHERE THE CAMERA IS	HOW EXISTING VS PROPOSED IS SHOWN
0:00–0:10	1	Arrival	Outside the main entry (Grid A)	Real facade photo, slow zoom
0:10–0:28	2	The hall today	Montage, existing only	Site photos and existing model, with three key numbers
0:28–0:46	3	Lobby concourse	Inside lobby, eye-level pan	Wipe: existing lobby photo → render at same angle
0:46–1:00	4	The Grid B wall	Facing Grid B, then through the centre door	Wipe: taped glass → Hadang relief / acoustic panels
1:00–1:24	5	Ceiling: sound and air	Hall rear-centre, tilt up, dolly forward	Matched-camera wipe: flat ceiling → baffles + cassettes
1:24–1:48	6	Walls, columns, drapery, floor	Tracking along the Grid 1 side wall	Photo of curtains over exits → render
1:48–2:06	7	The stage	Centre aisle, walking to the stage	Fixed concrete stage → modular stage → stage struck
2:06–2:46	8	One hall, four layouts	Locked high corner camera	Crossfade between layouts; small inset of the observed event
2:46–3:00	9	Close	Rise to a wide hero view	Proposed only, fade to title

Camera path on the plan

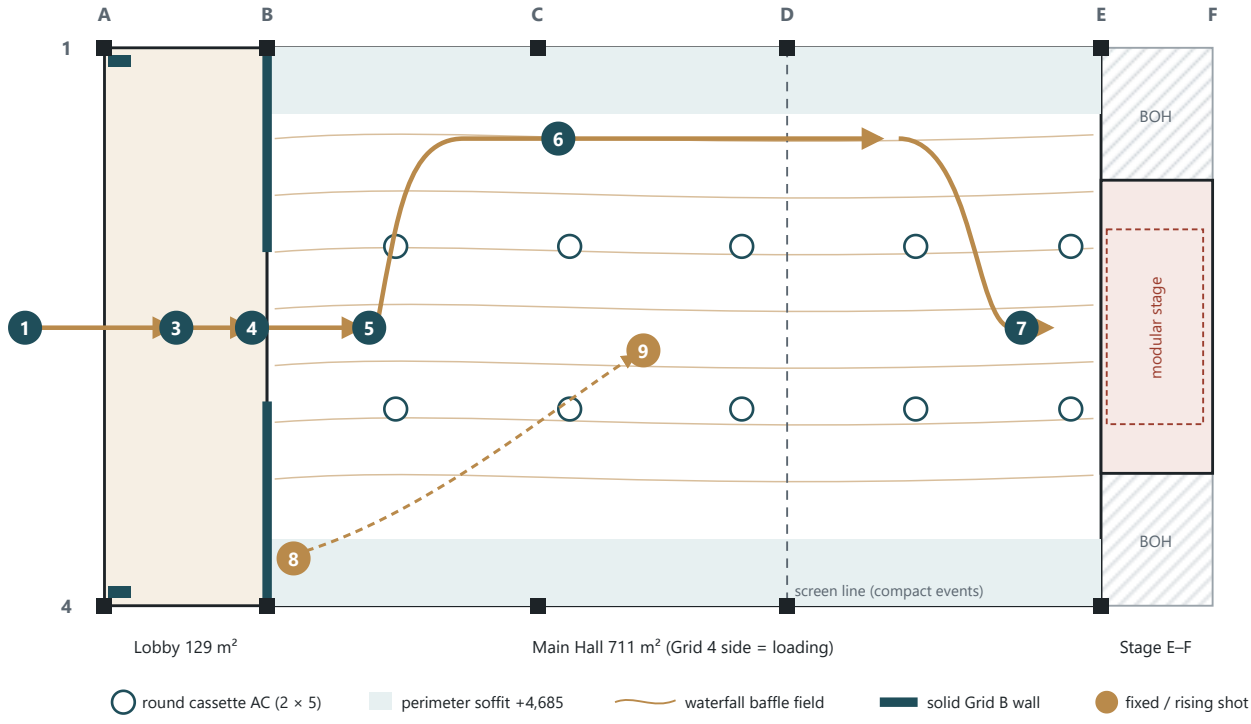

Schematic, not to scale. Stop numbers match segment numbers. Segment 2 is a montage of existing conditions and has no stop. Back-of-house (Zone 4) is outside the modeled scope, so keep the camera out of it.

Segment script

1 Arrival — 0:00–0:10 · 10 s

CAMERA Outside the main entry at Grid A. Slow push-in toward the lobby doors. If the exterior is not modeled, use a real facade photo with a slow zoom.

ON SCREEN Title card: study title (short form), "Calbayog Cultural Convention Center · Hinay-La St., Brgy. Capoocan, Calbayog City".

> **NARRATION · 24 WORDS**
>
> This is the Calbayog Cultural Convention Center, the city's main air-conditioned civic hall. Graduations, trainings, banquets and trade fairs all share one 840-square-meter interior.

WHY IT'S FRAMED THIS WAY

- "All share one interior" sets up the whole argument: one room has to serve four event types. Those four types come from the 127-event ledger (2014–2026): plenary 48.8%, classroom 25.2%, banquet 13.4%, exhibition 12.6%.
- The facade appears for context only. The study is non-structural interior work (RA 10350), so the exterior is not part of the design.

2 The hall today — 0:10–0:28 · 18 s

CAMERA Montage, 3–4 s per shot, all tagged EXISTING: (a) empty hall wide from the rear, (b) Grid B glass taped over with tarps, (c) curtains covering side exits, (d) ground truss towers and taped floor cables at an event, (e) the fixed concrete stage. Use your empty-hall audit and event observation photos, or a walk through an existing-condition model.

ON SCREEN Three numbers, one at a time: "Attendee comfort: 2.44 / 5 (N = 100)" · "Echo: 2.53 s (speech target 0.8–1.1 s)" · "Changeover: 4–12 hours"

> **NARRATION · 45 WORDS**
>
> But the room works against the people using it. In our survey of 100 attendees, every comfort item scored below 3 out of 5. Sound lingers for two and a half seconds, the middle rows run hot, and each changeover takes four to twelve hours.

WHY IT'S FRAMED THIS WAY

- This is the spatial-analysis half of the thesis in 18 seconds. Each number comes from a different method: the attendee survey, the acoustic audit and the planner survey. Three methods agreeing is your strongest point.
- The five comfort items all scored below 3: lighting 2.69, acoustics 2.57, sightlines 2.45, legroom 2.39 and thermal comfort 2.08, the lowest.
- 2.53 s is the unoccupied decay from the pink-noise test at 8 nodes (occupied: 1.85–2.20 s). It is caused by 711 m^2 of glazed tile, a hard ceiling and unpadded gypsum bulkheads.
- The 4–12 hour changeover figure was reported by 83.3% of the 12 planners and operators surveyed.

3 Lobby concourse — 0:28–0:46 · 18 s

CAMERA	Enter through the main doors at eye level (1.6 m). Slow pan across the 129 m² lobby: split-type ACs at Columns 1A and 4A, ceiling curtain tracks with fabric dividers set up for registration plus a few stalls, and the clear zones at the doors.
COMPARE	Vertical wipe from the existing lobby photo (bare, uncooled, missing ceiling lights) to the render at the same angle.
CALLOUTS	"Split-type AC × 2 · 22–24 °C" · "Fabric divider tracks" · "2.0 m clear at every door"

> **NARRATION · 50 WORDS**
>
> The redesign starts in the lobby, which used to be uncooled. Two split-type units now keep it at 22 to 24 degrees. Ceiling tracks with fabric dividers let it work as registration, VIP holding, or eight craft stalls, and the two meters in front of each door always stay clear.

WHY IT'S LIKE THIS

- **Cooling:** the lobby was hot and humid and let in street noise, and arriving guests waited there. Cooling it turns a hallway into usable pre-function space for processional holding (Scenario 1C) and a concourse expo (Scenario 4D).
- **Split-type, not cassettes:** the lobby ceiling is only 3.00 m, and the units run on the existing wall outlets at Columns 1A and 4A.
- **Fabric dividers, not walls:** the lobby changes with every event. The tracks hide in the ceiling when they aren't needed.
- **2.0 m door buffer:** a layout-manual rule written after trade-fair displays were seen sitting at exit doors (RA 9514 egress).
- **No catering in the lobby:** buffet lines move to the rear-hall corners, so food service never crosses the guest arrival line.

Careful: the doors that open only one leaf (1000 mm) are an exterior issue. Re-opening them and retrofitting outward-swinging doors is a *recommendation to City Engineering*, not part of your interior design. If new doors appear in the render, label them "recommended" or leave them out of the narration.

4 The Grid B wall: the threshold — 0:46–1:00 · 14 s

CAMERA	Stop facing Grid B from the lobby and hold on the Hadang relief. Walk through the centre door bay (2B–3B) into the hall, then turn 180° to show the hall face: staggered beige fabric panels with LED cove.
COMPARE	Wipe from a photo of the glass bays covered with tarps to the render.
CALLOUTS	"Hadang Festival relief · CNC-carved wood" · "Fabric acoustic panels · NRC ≥ 0.75"

> **NARRATION · 38 WORDS**
>
> This wall used to be glass, and staff taped tarps over it at nearly every event. Now it's solid. The lobby side carries a carved Hadang Festival relief, and the hall side is lined with fabric acoustic panels.

WHY IT'S LIKE THIS

- **Solid wall:** the 3.54 m glass bays (1B–2B, 3B–4B) let light into the hall and sound into the lobby. During the TESDA graduation the lobby measured 81.8–85.2 dBA of bleed. A solid wall with absorptive panels fixes both and ends the tarp routine.
- **Why the mural faces the lobby:** the lobby is where people arrive and wait, so that is where a civic landmark belongs. Inside the hall, stylists need neutral walls (Segment 6). The boldest cultural piece sits where it never competes with event décor.
- **Why Hadang:** it is Calbayog's premier festival. The relief abstracts its dance movement and rooster (*manok*) imagery.

5 Ceiling: sound and air

1:00–1:24 · 24 s

CAMERA	From the hall rear-centre, slow tilt up (3–4 s) to reveal the waterfall baffles, then a slow dolly forward underneath. Show the perimeter soffit with its LED cove, and the round cassette units hanging below the baffles.
COMPARE	Matched-camera wipe: the same move rendered on the existing ceiling (flat drywall, perimeter wall units), then the proposed one. Optionally animate "2.53 s → 0.92 s".
CALLOUTS	"Waterfall baffles · PET felt, NRC ≥ 0.85" · "Echo 2.53 s → 0.92 s (modeled)" · "10 round cassettes · 50 TR"

> NARRATION · 55 WORDS
>
> Look up. The old ceiling was hard drywall that threw sound back into the room. These felt baffles follow the falling lines of Calbayog's waterfalls, and they cut the modeled echo from 2.53 to about 0.9 seconds. Below them, ten round cassette units spread air evenly, so the middle rows stop being the hottest seats.

WHY IT'S LIKE THIS

- **Why the ceiling carries the acoustics:** it is the largest untreated surface and the one surface events never cover, so absorption placed there works for every layout. Speech needs 0.8–1.1 s, and the hall was about 130% over.
- **Why waterfalls:** Calbayog is the "City of Waterfalls" (Tarangban, Bangon, Mapaso), and interviewees EP1, EP3 and EA4 raised it themselves. Overhead, the motif never gets in the way of décor.
- **Extent:** the baffle field is 16.075 × 32.505 m (522.5 m^2), framed by 2.5 m perimeter soffits at +4,685 mm whose inward LED cove lights the baffles.
- **Why cassettes in a 2 × 5 grid:** thermal comfort scored lowest (2.08). Wall units cooled only the edges, and when the stage was draped two of them blew into the drape (EP5). Round cassettes throw air 360° from the middle of the room.
- **Why +4.215 m:** it leaves a 685 mm gap below the baffles (≥ +4.900 m), so air moves freely, the felt stays dry and the baffles need no cutouts. Low-velocity units keep noise near NC-30 (34–36 dBA), quiet enough for speech.

6 Walls, columns, drapery, floor

1:24–1:48 · 24 s

CAMERA	Lateral track along the Grid 1 side wall at eye level: a column (banig-weave base, oak fluting above), full-height drapery, a figure drawing a curtain with the wand, a magnetic holdback at a door, a lit exit sign. End by panning to the stage wall (tikog wallpaper) and tilting down to the floor.
COMPARE	Photo of curtains hiding the sliding exits, with no exit signs → render.
CALLOUTS	"Banig-weave MCM base · oak fluting" · "Wand-drawn drapery · magnetic holdbacks" · "Exit signs · 90-min battery" · "Acoustic LVT, terrazzo look"

> NARRATION · 59 WORDS
>
> The finishes stay neutral on purpose. Stylists told us they cover loud walls anyway, and strong colors tint faces on camera. So culture shows up as texture: tikog grain behind the stage, banig weave on the column bases. The curtains now open with a wand from the floor and lock back with magnets, so the exits are never hidden.

6 Walls, columns, drapery, floor (continued) reasoning

WHY IT'S LIKE THIS

- **Neutral palette:** EP3, EP4 and EP5 all said that saturated walls bounce color onto gowns and skin on camera, and that stylists drape over heavy décor anyway. Neutral, textured finishes cut styling cost and still read as Waray.
- **Abstraction, not real mats:** literal banig or tikog on walls is a flame-spread, mold and dust risk in a public assembly hall. Commercial finishes (Wallcrown UW1062 wallpaper, MCM cladding) carry the pattern and still meet fire code.
- **Column base to +1,200 mm:** this is the height where carts and flight cases hit (frame and jamb damage was observed on the Grid 4 loading side). It is also the height where people see and touch, so the weave is noticed. Oak-tone fluting above adds warmth up to the soffit.
- **Drapery:** the old curtains had no tiebacks and hid the exits. The new drapery runs full height (+4,685 mm to the floor) for more absorption (NRC ≥ 0.70) and splits at every door. A 2,700 mm wand means no ladders, and the magnets hold the 2,000 mm opening clear.
- **Exit signs:** there were none (an RA 9514 gap). The new ones carry 90-minute battery backup.
- **Floor:** the reflective porcelain gives way to A-xet Bianco Snow Terrazzo acoustic LVT, which cuts footfall noise and floor reflection. With the fixed stage gone, it runs unbroken to Grid F.

7 The stage 1:48–2:06 · 18 s

CAMERA	Walk up the centre aisle toward the stage. Show the 600 mm modular stage (3 × 3 decks) with the platform lift in the side gap. Then crossfade to the struck state: decks gone, LVT running to the back wall.
COMPARE	Three beats: EXISTING fixed concrete stage → PROPOSED deployed → PROPOSED struck.
CALLOUTS	"Fixed 940 mm concrete → modular 300 / 600 mm" · "Ramp at 300 mm, lift at 600 mm" · "Stage down: +52.5 m²"

> **NARRATION · 45 WORDS**
>
> The old stage was fixed concrete, 940 millimeters high. It's replaced with modular decks set at 300 or 600 millimeters, with a ramp or a lift for wheelchair users. When an event needs a flat floor, the stage comes down and frees 52.5 square meters.

WHY IT'S LIKE THIS

- **Why remove the concrete stage:** it was dead space at every flat-floor event (expos, floor-level dances, big banquets), and at 940 mm it is steep for the front rows.
- **Why only 300 and 600 mm:** BP 344 ramps are capped at 1:12. A 300 mm dais needs a 3.6 m ramp, which fits the side gap. 900 mm would need about 10.8 m, so 600 mm uses a platform lift and 900 mm is left out.
- **Why 3 × 3 decks:** 7.32 × 3.66 m centred in the 11.11 m recess leaves about 1.9 m on each side for stairs and the ramp or lift.
- **What 52.5 m² buys:** 4–6 more booths or 30–40 more banquet seats. The tikog wallpaper behind still works as a backdrop with the stage up or down.

8 One hall, four layouts

2:06–2:46 · 40 s

CAMERA Locked, elevated camera at the rear corner (Grid B / Grid 4, about 3.5 m high, wide lens), or a very slow orbit. Crossfade four layouts, about 10 s each. Keep the camera identical so only the furniture changes.

COMPARE For each layout, a small corner inset (2–3 s) of the observed event: ECCD Moving-Up Ceremony, Culture-Based Governance training, Hermana Night 2026, PESO Career Expo.

ON SCREEN "Plenary · 288 seats + 4 wheelchair bays" · "Classroom · 192 seats · ceiling power" · "Banquet · 300 max · 1.8 m waiter lanes" · "Exhibition · up to 26 booths"

> **NARRATION · 73 WORDS**
>
> Because nothing is fixed, the same hall is designed to reset in under ninety minutes. A peak convocation: 288 seats in staggered chevron rows, plus four wheelchair bays. A training: 192 seats at flip-top tables, with power dropped from the ceiling instead of taped to the floor. A gala: 300 guests at most, the real limit once waiters get their 1.8-meter lanes. A trade fair: up to 26 booths on a looped aisle.

WHY IT'S LIKE THIS

- **Why these four:** they are the four typologies found in the ledger. The video shows the peak version of each; the layout manual also has mid and compact versions plus four hybrids (13 scenarios in all).
- **Plenary:** on a flat floor, sightlines depend on staggered seats (C ≥ 60 mm) in rows that are straight or bent up to 15°. The 900 mm pitch fixes the cramped legroom (2.39; existing pitch under 750 mm). An 1,800 mm centre aisle and side aisles lead to the exits.
- **Classroom:** 1.4 m row pitch, tables on lockable casters, power from ceiling reels. No taped cords across the exit paths.
- **Banquet:** the code load factor alone gives about 507 (711 ÷ 1.40). Take out the stage, aisles, waiter lanes and catering and about 420–450 m^2 of dining floor is left, which caps a comfortable banquet at 250–300. At Hermana Night, 450–500 guests pushed chairs under 300 mm apart and tables against exits. Template 3A-2 (long tables along a 2.4–3.0 m processional aisle for the *carroza* and sword arches) is the alternate.
- **Overhead rigging:** removing four ground truss towers recovers 40 seats.
- **Exhibition:** stage struck, a continuous 2.4 m loop with no dead ends, 2 m kept clear at doors, and every exit within 45 m.
- **Crew speed:** rows are set off the column grid using laminated layout sheets, so crews get it right the first time without floor marks.

9 Close

2:46–3:00 · 14 s

CAMERA Slow rise and pull-back from the hall centre to a wide hero view (banquet or plenary under the warm lighting scene). Fade to the title card.

ON SCREEN "Non-structural · culture-led · ready to reset", then names, program, school and year.

> **NARRATION · 30 WORDS**
>
> None of this touches the structure. The shell stays as it is. What changes is how the room behaves: quieter, cooler, easier to exit, quick to reset, and recognizably Calbayog.

WHY IT ENDS HERE

- It closes on the scope (non-structural, RA 10350) and on the three pillars of the study: modular layouts (SPOP 2), technical future-proofing (SPOP 3.1) and cultural placemaking (SPOP 3.2).

Existing vs proposed: what changed and why

Quick reference for captions and for the Q&A after the video. The last column is the evidence or standard behind each move.

ELEMENT	EXISTING	PROPOSED	BASIS
LOBBY (129 M²)			
Climate	Not air-conditioned, hot and humid, street noise	2 split-type inverter units at Col 1A / 4A, 22–24 °C	Thermal item 2.08 (lowest); 3.00 m ceiling; existing outlets
Use	Pass-through; chairs stacked in corridors	Fabric divider tracks: registration, VIP holding, up to 8 stalls (2 × 2 m)	Hybrid events (Scenarios 1C, 4D)
Doors	One leaf of each double door opens (1000 mm)	2.0 m no-furniture buffer; door fix recommended to City Engineering	RA 9514 egress; outside interior scope
Grid B wall	3.54 m glass bays, taped with tarps	Solid wall: Hadang CNC relief (lobby), fabric panels NRC ≥ 0.75 + LED cove (hall)	81.8–85.2 dBA lobby bleed (TESDA graduation)
MAIN HALL ENVELOPE (711 M²)			
Ceiling	Flat hard drywall; missing fixtures; exposed plenum near Col 3B	Waterfall PET-felt baffles NRC ≥ 0.85 over 522.5 m²; soffits at +4,685 mm	RT60 2.53 s measured → 0.92 s modeled; target 0.8–1.1 s
Upper walls	Unpadded gypsum bulkheads (flutter echo)	Neutral painted finish above; full-height drapery below the soffit	Acoustic audit; Sabine model
Stage wall	Plain painted; rented LED walls	Wallcrown UW1062 tikog-texture wallpaper, light beige	Neutral palette rule (EP3, EP4, EP5)
Columns	Bare, hit by carts	White MCM banig-weave base to +1,200; oak-tone Flexiflute above	Impact zone; place attachment (Scannell & Gifford)
Windows / exits	Curtains from +3,640, no tiebacks, hide exits	Full-height wand-drawn drapery, split at doors, magnetic holdbacks	RA 9514; NRC ≥ 0.70; no ladders
Floor	Glazed 600 × 600 porcelain tile	A-xet Bianco Snow Terrazzo acoustic LVT, continuous to Grid F	Footfall noise; floor reflection
SYSTEMS			
Cooling	Perimeter wall units; hot centre rows	10 round cassettes (5 TR each, 50 TR) in a 2 × 5 grid at +4.215 m	685 mm air gap under baffles; NC-30
Rigging	No points; nails, tie-wire, wall scars; 4 ground truss towers	Overhead Unistrut grid + hoists; Unistrut swag rail hidden in the soffit	40 seats recovered; no wall damage
Lighting	Unshielded fixtures, glare, rented lights	3-circuit dimmable tracks with presets: 300–500 lx plenary, 100–200 lx banquet	Lighting item 2.69; CIBSE / IES
Power & AV	Cables taped across floors and exits	Ceiling power reels and drop boxes	Trip hazards on egress paths
Life safety	No exit signs; no restroom wayfinding	Lit exit signs with 90-min battery; wayfinding	RA 9514
STAGE & LAYOUTS			
Stage	Fixed concrete, 940 mm, 52.5 m²	Modular decks at 300 / 600 mm; ramp or lift; strike for flat floor	BP 344 1:12 ramp; 900 mm needs 10.8 m
Seating	Monobloc chairs, pitch under 750 mm, blocked views	900 mm pitch, staggered chevron rows, BP 344 bays	Legroom 2.39; sightlines 2.45; NBCP 1207
Banquet	450–500 squeezed in; chairs under 300 mm apart	250–300 ceiling; 1.62–1.8 m lanes; catering in rear corners	Neufert; Panero & Zelnik; code load ~507
Setup	Trial and error, 4–12 hours	Layout manual keyed to column grid; dollies; target under 90 min	Planner survey (83.3%)

Showing existing vs proposed on screen

TECHNIQUE	HOW TO DO IT	USE IN
Matched-camera wipe	Render the same camera move twice, once with the existing model and once with the proposed, then run a slow vertical wipe between them. This is the strongest comparison because nothing changes except the design.	Segments 3, 4, 5
Photo-to-render dissolve	Match the render camera to a real site photo (same height and lens), then cross-dissolve. It works even without an existing-condition model.	Segments 3, 4, 6, 7
Locked-camera layout morph	One camera, several scenes. Only the furniture tag changes. Crossfade 1 s between them.	Segment 8
Corner inset	A small framed photo of the observed event (Option A) in a corner for 2–3 s while the proposed layout plays full-screen.	Segment 8
Split screen	Left existing, right proposed, a number under each. Use sparingly, since it halves the image size.	Optional, Segment 2 or 5

Model setup (SketchUp)

- Keep one file with tags: **EXISTING**, **PROPOSED-ENVELOPE**, **STAGE-UP**, **STAGE-DOWN**, **LAYOUT-PLENARY**, **LAYOUT-CLASSROOM**, **LAYOUT-BANQUET**, **LAYOUT-EXHIBIT**, **LOBBY-REGISTRATION**.
- Save a scene for each state so Enscape can switch between them on the same camera path.
- If you have no full existing model, a simple one (flat ceiling, glass Grid B, concrete stage, tile floor) is enough for Segments 5 and 7.
- Add people at realistic density, and one staff figure holding the drapery wand for Segment 6.

Camera (Enscape video editor)

- Eye height 1.5–1.6 m for walking shots; about 3.5 m for the layout corner camera.
- Field of view 60–70°. Avoid ultra-wide lenses, which distort the room.
- Walk slowly (about 0.8–1 m/s), turn slowly, and ease in and out on every keyframe.
- Export 1920 × 1080 at 30 fps. Render each segment as its own clip so you can retime it in the edit.

Editing

- Record the narration first at a calm pace, then cut the clips to the audio.
- Music sits well under the voice (about −20 dB). No lyrics.
- Burn in captions, since panel members often watch without sound.
- Callout labels: 8 words at most, on screen for at least 3 s, in the same style and position each time.
- Keep the `EXISTING` / `PROPOSED` tag in the same corner throughout.

If you run long

- First cut: the “VIP holding, or eight craft stalls” list in Segment 3 (say “registration or a small expo”).
- Second cut: the ramp and lift clause in Segment 7. Move it to a callout.
- Third cut: drop one layout from Segment 8 (classroom) and show it only as a 2 s flash.
- Never cut Segment 2. Without the problem, the design has nothing to answer.

Clip checklist

- [ ] Facade photo or exterior render (Seg 1)
- [ ] 5 existing-condition photos: empty hall, taped glass, curtains over exits, truss towers and taped cables, concrete stage (Seg 2)
- [ ] Existing lobby photo + matching lobby render (Seg 3)
- [ ] Grid B: lobby face hold, walk-through, hall face turn (Seg 4)
- [ ] Ceiling tilt-up, existing and proposed, same camera (Seg 5)
- [ ] Side-wall track with drapery wand, holdback, exit sign (Seg 6)
- [ ] Stage: existing photo, deployed, struck (Seg 7)
- [ ] Corner camera × 4 layouts + 4 event inset photos (Seg 8)
- [ ] Hero rise shot under warm lighting (Seg 9)
- [ ] Title and end cards; callout label template
- [ ] Narration recording (about 3:00 at a calm pace)

Key numbers

Interior envelope	840 m^2 = 711 hall + 129 lobby
Event ledger	127 events, 2014–2026
Attendee comfort (IEQ)	2.44 / 5, N = 100
Lowest item	Thermal comfort, 2.08
Reverberation	2.53 s measured → 0.92 s modeled
Speech target	0.8–1.1 s
Changeover today	4–12 h (83.3% of planners)
Changeover target	under 90 min
Soffit / baffles / AC	+4,685 / ≥ +4,900 / +4,215 mm
Stage	940 mm fixed → 300 / 600 mm modular; +52.5 m^2
Peak plenary	288 seats + 4 BP 344 bays
Full classroom	192 seats
Banquet ceiling	250–300 (code load ~507)
Exhibition	20–26 booths, 2.4 m loop

Accuracy checks

Wording that keeps the video consistent with your manuscript and safe under questioning.

Say "modeled" for 0.92 s and NC-30. They are calculated, not measured after construction. 2.53 s *is* measured.

Say "designed to" or "target" for the under-90-minute reset. It has not been timed in a real changeover.

Banquet limit: 250–300 is the ergonomic ceiling set by table spacing. Don't say the building code limits it to 300; the code load factor alone allows about 507.

Doors and facade: handed over as recommendations to City Engineering. They are outside the interior scope, so don't present them as your design.

Back-of-house (Zone 4) is context only and not modeled. Keep the camera out.

FGD scores (the Option A vs B rubric means) are left out of this script on purpose. Add them only once you've confirmed they match the actual session's Google Form export.

Use "proposed", not "new" or "renovated". Nothing has been built.

Words to say slowly

- *Tikog* (tee-kog), *banig* (bah-nig), *Hadang* (hah-dang), *carroza*
- "Reverberation": you can just say "echo" in the narration and keep RT60 in the label.
- Say "2.53 seconds", and "millimeters" in full, not "mm".